


Haccess offers you the equipment of your bathroom, shower, mirrors, accessories, hairdryer and complements.

ORGANIC LED MIRROR H600 X W1100 MM BACKLIGHT, 4000° K, WITH DEFOGGER

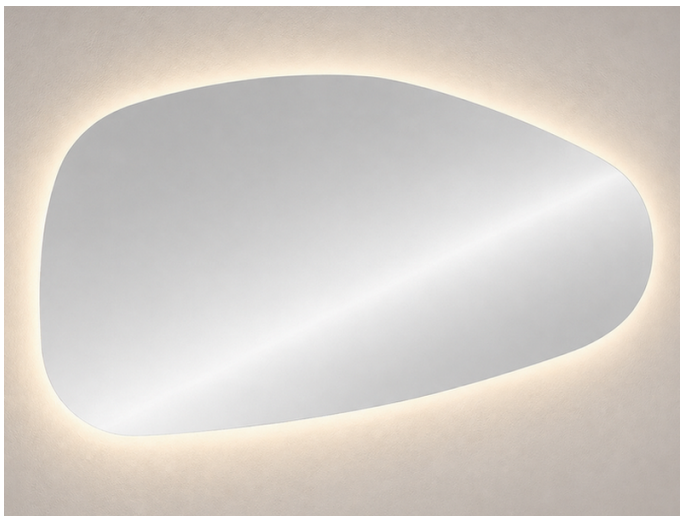

LED Organic mirror H600 x W1100 mm with backlight lighting.
Green Mirox double-coat treatment.
Mirror thickness : 5 mm.
Colour temperature : 4000 K – neutral white.
LED strip 12V, IP65, 120 LEDs/m.
LED strip lifetime : 40 000 hours (guaranteed for 25,000 hours).
LED cooling through heat dissipation via an aluminium profile.
Luminous flux : 1200 lm/m.
CRI (Color Rendering Index) : 90.
Class 2, volume 2, IP44.
IP44 junction box.
Tension 230V | 50-60 Hz.
Supplied ready for installation, with mounting brackets and slotted holes for adjustment.
With defogger 30 W.
Option: 12 V with remote driver for installation within Zone 1 (accessible bathroom / PRM compliant).

Le miroir doit être raccordé à l'alimentation par l'intermédiaire d'un bloc de jonction classe 2 - IP24 conformément aux règles de la norme NFC 15-100 (non fourni).

Ref : LED.102.60.110.ORG.MIR.4

TECHNICAL FEATURES

Dimensions

1100 x 600 mm

Materials

Glass

Haccess offers you the equipment of your bathroom, shower, mirrors, accessories, hairdryer and complements.

LED.102.60.110.ORG.MIR.4 : ORGANIC LED MIRROR H600 X W1100 MM
BACKLIGHT, 4000° K, WITH DEFOGGER

