


Haccess offers you the equipment of your bathroom, shower, mirrors, accessories, hairdryer and complements.

## ORGANIC LED MIRROR H600 X W1100 MM BACKLIGHT, 2700° K, WITH DEFOGGER

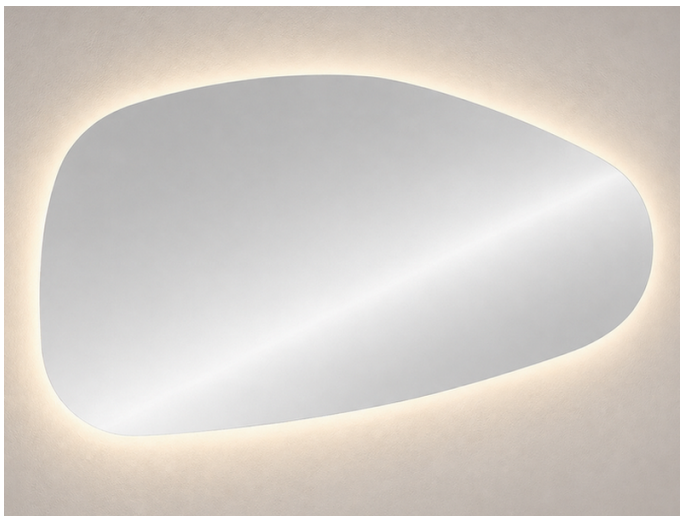

LED Organic mirror H600 x W1100 mm with backlight lighting.  
Green Mirox double-coat treatment.  
Mirror thickness : 5 mm.  
Colour temperature : 2700 K – extra warm white.  
LED strip 12V, IP65, 120 LEDs/m.  
LED strip lifetime : 40 000 hours (guaranteed for 25,000 hours).  
LED cooling through heat dissipation via an aluminium profile.  
Luminous flux : 1200 lm/m.  
CRI (Color Rendering Index) : 90.  
Class 2, volume 2, IP44.  
IP44 junction box.  
Tension 230V | 50-60 Hz.  
Supplied ready for installation, with mounting brackets and slotted holes for adjustment.  
With defogger 30 W.  
Option: 12 V with remote driver for installation within Zone 1 (accessible bathroom / PRM compliant).

**Le miroir doit être raccordé à l'alimentation par l'intermédiaire d'un bloc de jonction classe 2 - IP24 conformément aux règles de la norme NFC 15-100 (non fourni).**

Ref : LED.102.60.110.ORG.MIR.2.7

### TECHNICAL FEATURES

**Dimensions**

1100 x 600 mm

**Materials**

Glass



Haccess offers you the equipment of your bathroom, shower, mirrors, accessories, hairdryer and complements.

Haccess offers you the equipment of your bathroom, shower, mirrors, accessories, hairdryer and complements.

LED.102.60.110.ORG.MIR.2.7 : ORGANIC LED MIRROR H600 X W1100 MM  
BACKLIGHT, 2700° K, WITH DEFOGGER

